
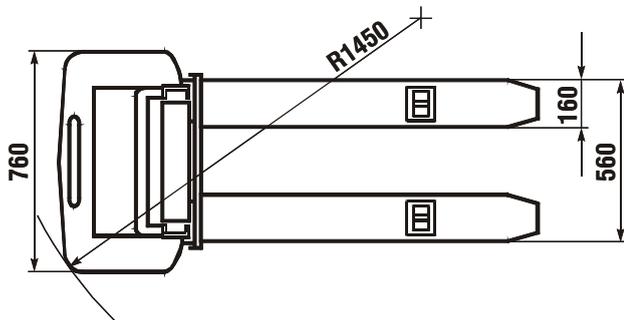


Hand -operated high-lift truck

VPEH 1 - 1600, VPEH 1 - 2500,
VPEH 1,25 - 1600, VPEH 1 - 2800, VPEH 1 - 3600

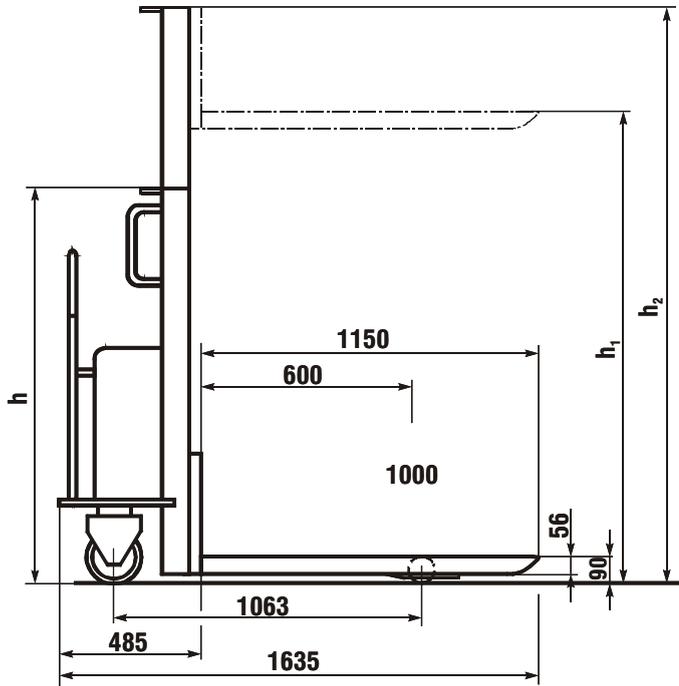

Type	h mm	h ₁ mm	h ₂ mm
VPEH 1 - 1600	1980	1600	1980
VPEH 1 - 2500	1720	2500	2880
VPEH 1,25 - 1600	1980	1600	1980
VPEH 1 - 2800	1870	2800	3180
VPEH 1 - 3600	2270	3600	3980

- Hand operated
- Load lifting and lowering is electro-hydraulic
- Built-in charger 12V/ 88Ah, for heavy-duty service.
- LED display of the battery charge.
- On request electronic charging switch for 220 V main supply.

Easy Maintenance

- Manual operation with finely controlled lifting and lowering of the load.

Safe Service

- Speed of lifting with/without load 0.13/0.16 m/s.
- Constant lowering speed.
- Built-in pressure relief valve.

Stability

- Drawbar-controlled tie-rod axle-pivot steering. Parking brake on one of the steering wheels.
- Steering wheels with solid rubber tyres, 2 cantilever fork rollers with polyamide or vulkollan tyres on request.

Long Life

- reliable construction
- Hydraulic power unit with DC motor 2.0 kW- 15% cyclic duration factor and low noise gear pump. Lifting cylinder with hard chromium plated load piston.

Special Designs On Request